




Dimension

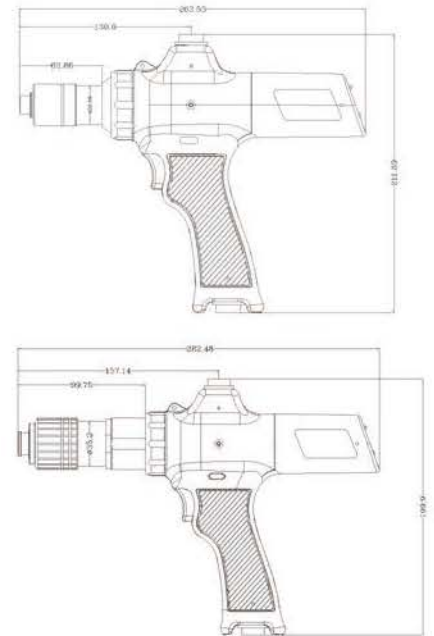

Feature

- It is automatic Electric Screwdriver. When the torque is locked, the clutch will automatically trip, the motor power will be automatically off and the electric screwdriver will stop running.
- Brushless Motor is applicable in a dust-free condition. The output of torque is highly stable. It is not only a easy-operate equipment but this screwdriver can be operated for a long period.
- Non-contact switch is used to provide a durable life in which there is no necessity to replace the item often.

Technical parameters

Model	Measuring Range		No load speed(r.p.m)		Input voltage	Weigh(g)	Diameter of screw	Screw bit
	kgf.cm	N.m	HI	LO				
SD-TBC25L/SD-TA25L	5-25	0.5-2.45	1000	650	30V	750	M2.6-M4.0	1/4hex
SD-TBC30LF/SD-TA30LF	10-30	0.98-2.94	2000	—		750	M2.6-M4.5	1/4hex
SD-TBC35L/SD-TA35L	10-35	0.98-3.43	500	350		750	M3.0-M5.0	1/4hex
SD-TBC45L/SD-TA45L	15-45	1.47-4.41	500	350		750	M3.5-M5.5	1/4hex
SD-TBC50L/SD-TA50L	20-50	1.96-4.9	1000	—		750	M4.0-M6.0	1/4hex
SD-TBC70L/SD-TA70L	30-70	2.94-6.86	800	—		1300	M5.0-M6.5	1/4hex
SD-TBC100L/SD-TA100L	40-100	3.92-9.8	500	—		1300	M6.0-M8.0	1/4hex
SD-TBC150L/SD-TA150L	60-150	5.88-14.7	350	—		1300	M8.0-M10	1/4hex

Standard Accessories

型号 Model	SD-TBC25L SD-TBC30LF SD-TBC35L SD-TBC45L	SD-TBC50L SD-TBC70L SD-TBC100L SD-TBC150L	SD-TA25L SD-TA30LF SD-TA35L SD-TA45L	SD-TA50L SD-TA70L SD-TA100L SD-TA150L
电源适配器 Power adapter	SD-T30V200W3P		SD-T30V200W3P	
连接线 Cable	SD-3P(19MM)		SD-3P(19MM)	
电源线 Power cord	国标梅花尾 National plum blossom tail		国标品字尾 National standard three square pins tail	
电批吊簧 Electric screwdriver suspension spring	1.0*9*290		1.0*9*290	
起子头 Screwdriver bits	SSH1/4x65x1# SSH1/4x65x2#		SSH1/4x65x1# SSH1/4x65x2#	

Note: Factory provides only one piece as the standard quantity for each kind of accessory